

3FD

ENGINE POWERED FORKLIFT

10.0 to 16.0 ton
S E R I E S



 **TOYOTA**

ATTACHMENTS AND SPECIAL EQUIPMENT

Side Shift Fork

Hinged Fork

Steel Cabin





Toyota offers a full line-up of attachments and special equipment that can enhance the efficiency of your forklift. Contact your Toyota representative for details.

MAIN SPECIFICATIONS

Model		3FD100	3FD115	3FD135	3FDE150	3FDE160
Engine Model		H07D	H07D	H07D	H07D	H07D
Load Capacity	kg	10000	11500	13500	15000	16000
	lb.	22000	25000	30000	33000	35000
Load Center	mm	600	600	600	600	600
	in.	24	24	24	24	24
Overall Width	A mm	2290	2330	2420	2420	2480
	in.	90.2	91.7	95.3	95.3	97.6
Turning Radius (Outside)	B mm	4000	4050	4300	4350	4450
	in.	158	160	170	172	176
Overhead Guard Height	C mm	2725	2740	2755	2755	2775
	in.	107.3	107.9	108.5	108.5	109.3
Length to Fork Face	D mm	4200	4280	4540	4650	4750
	in.	165.4	168.5	178.7	183.1	187

ENGINE SPECIFICATIONS

Model		HINO H07D Diesel
Piston Displacement	cc	7412
	cu-in	452
Rated Horsepower/r.p.m.	kW	105/2150
	JIS ps	140/2150
	SAE HP	132/2150 Net
Rated Torque/r.p.m.	N-m	480/1600
	JIS kg-m	49/1600
	SAE ft-lb	350/1600 Net

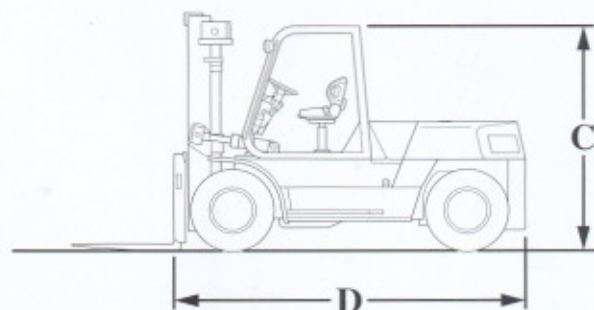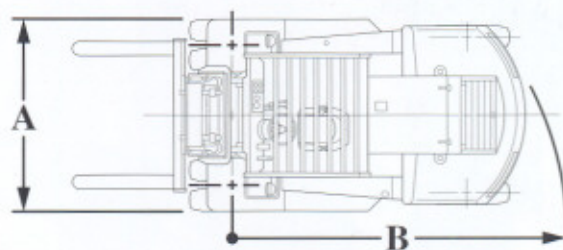

Availability and specifications are determined regionally and are subject to change without notice. Please consult your Toyota representative for details.

Printed on recycled paper.

All rights reserved by Toyota Industries Corporation.



TOYOTA Material Handling Company

A Division of TOYOTA INDUSTRIES CORPORATION

CAT.3FD100-160/E-0211/©/Printed in Japan/No.710520E0/1,000