



# WATER PUMP

## SINGLE-PHASE PORTABLE PUMP



ITEMS	MAKER	TSURUMI
RESIDUE DRAINAGE PUMP	MODEL	LSC1.4S
	Discharge Bore (mm)	25
	Motor Output (kW)	0.48
	Phase	Single
	Starting Method	Capacitor Run
	Dry Weight (Kg)	12
	Cable Length (m)	5

\* Weights excluding cable

\*\* Can drain water to 1mm in depth. A valve seat and swing check valve prevent suctioned water from backflowing.




ITEMS	MAKER	TSURUMI
FREE-POSITIONING RESIDUE DRAINAGE PUMP	MODEL	LSP1.4S
	Suction x Discharge Bore (mm)	25 x 25
	Motor Output (kW)	0.48
	Phase	Single
	Starting Method	Capacitor Run
	Max. Head (m)	6.9
	Max. Capacity (L/min)	50
	Max. Vacuum (kPa/mmHg)	-73.3/ -550
	Dry Weight (Kg)	16.5
	Cable Length (m)	5

\* Weights excluding cable

\*\* Can pump pooled water from shallow recesses using the suction attachment. A syphon breaker mechanism prevents backflowing and the seal water from draining out.

■ Working range diagram

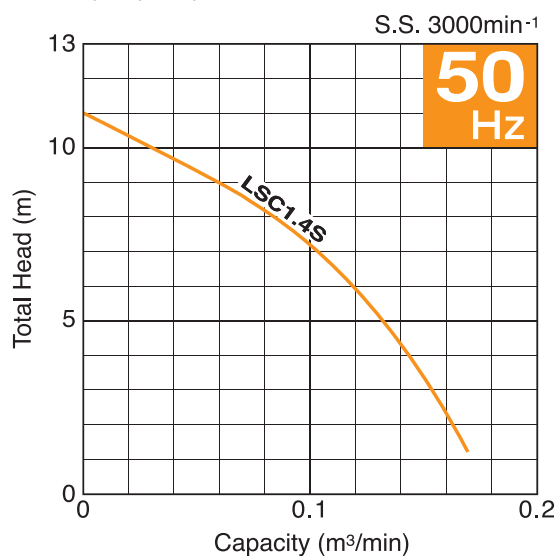

■ Dimensions

