




WATER PUMP

ENGINE PUMP



ITEMS	MAKER	TSURUMI
CLEAN WATER PUMP	MODEL	TE5-50H
	Inlet x Outlet Bore (mm)	50 x 50
	Max. Head (m)	32
	Suction Head (m)	8
	Max. Capacity (L/min)	520
	Engine	HONDA GX160H1
	Displacement (cm³)	163
	Fuel Tank Capacity (L)	3.6
	Max. Output (kW)	4.0
	Dry Weight (Kg)	25.1
	Packing Measurement (LxWxH) (mm)	543 x 384 x 447

■ Working range diagram

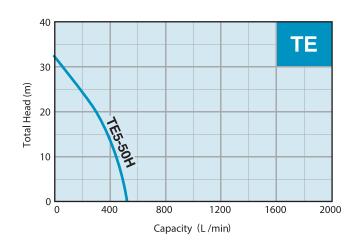

- TSURUMI Engine Pumps are constructed for maximum durability in a compact, easy handling design. Utilizing superior features and materials, Tsurumi provides an affordable, high value pump line designed to withstand your tough dewatering applications.
- Heavy-duty Honda OHV Engine delivers high power from a compact, reliable design.
- Pump unit is made of precision mould aluminum to attain the weight saving.
- Cast Iron Semi-open Impeller and Volute Casing provide increased durability.
- Durable Rolled-steel frame provides pump/ engine with maximum protection, perfect ease of handling or transport, and safe operation.

■ Applications

- Irrigation, Sprinkler, Cleaning.
 Dewatering storm water, groundwater, or puddles.
- Dewatering at construction sites.

Accessory items



Strainer



Hose Coupling (with packing)



Hose Band

Options



Discharge Hose NPT 2-inch, 50 ft



Wheel Kit Special tubular frame with wheels and handles